K32W061/41: High-Performance, Secure and Ultra-Low-Power MCU for Zigbee®,Thread™, and Bluetooth® LE 5.0 with Built-In NFC Option

K32W061_41

Last Updated: Apr 11, 2024

The K32W061/41 portfolio is designed to power the next generation of ultra-low-current multiprotocol wireless IoT devices with support for IEEE 802.15.4 mesh network protocols Zigbee® and Thread™ as well as Bluetooth® Low Energy 5.0. This portfolio also supports Matter, the unified IP-based application layer to work across ecosystems being developed by the Connectivity Standards Alliance, targeted for release by end of 2021.

These wireless MCUs include multiple low-power modes and ultra-low radio Tx and Rx power consumption which enables IoT products powered by K32W061/41 to have extended battery life. With high Rx sensitivity and configurable Tx output power, the K32W061/41 MCUs offer reliable and robust connectivity performance.

The K32W061/41 portfolio is powered by an Arm® Cortex®-M4 MCU and with 640 KB on-board flash and 152 KB SRAM, has enough room and flexibility for complex applications and over-the-air (OTA) upgrade capability without external memory. These devices also include a rich set of MCU digital and analog peripherals and multiple serial communication interfaces for embedded connected applications and a quad serial flash memory controller, SPIFI, that can be used to extend non-volatile memory.

K32W061/41 Block Diagram Block Diagram

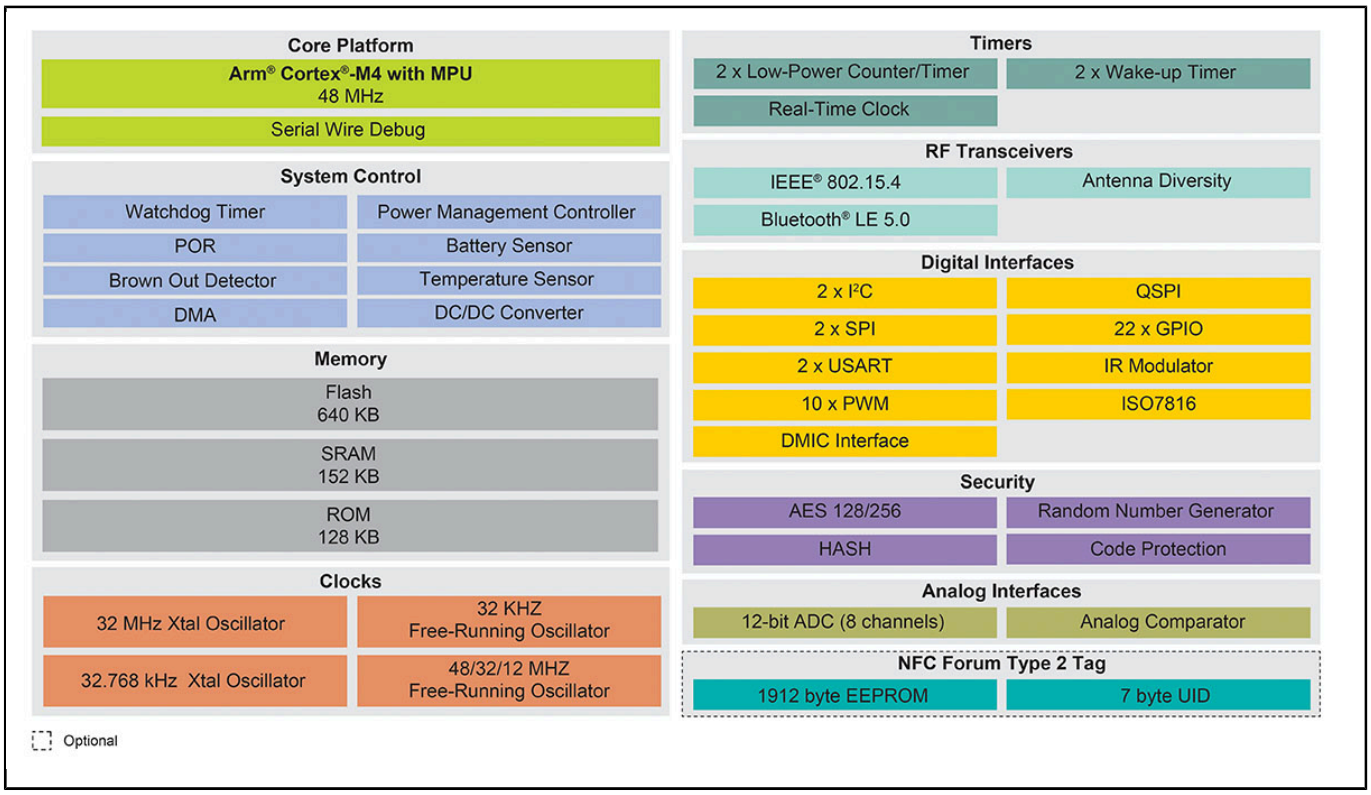

View additional information for K32W061/41: High-Performance, Secure and Ultra-Low-Power MCU for Zigbee®,Thread™, and Bluetooth® LE 5.0 with Built-In NFC Option.

Note: The information on this document is subject to change without notice.