

32-bit Microprocessors Fact Sheet

MPC5121e

Multi-core processor for consumer and industrial applications


Overview

The latest in integrated processors, Freescale's MPC5121e provides a computing platform for OEM, aftermarket, consumer and industrial applications. The MPC5121e uses an e300 core built on Power Architecture™ technology and is ideal for any embedded solution that requires sophisticated displays, graphics acceleration, rich user interfaces and network connectivity. The MPC5121e multi-core processor offers competitive cost, quality, reliability and performance.

Applications

- Gaming and pachinko machines
- Set-top boxes
- Surveillance and security systems
- Ultra-mobile PCs
- Industrial control
- Heavy equipment
- High-resolution display applications
- Health Care devices
- Military/defense
- Process control
- Data collection
- Factory automation
- Non-automotive transportation
- IP connectivity

MPC5121e Block Diagram

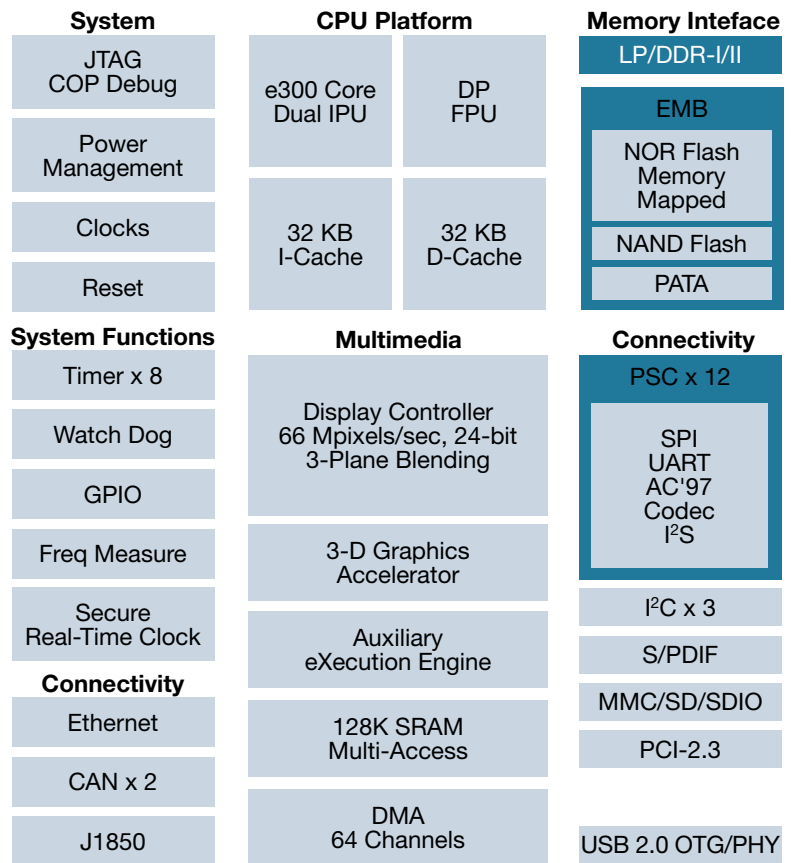

PPC5121VY400


Key Features

- Up to 400 MHz and 760 MIPS performance
- e300 core built on Power Architecture technology
- Instruction and data memory management unit (MMU)
- Double precision floating point unit (FPU) AXE, a fully programmable, 200 MHz, 32-bit RISC core for real-time acceleration tasks, such as audio
- PowerVR® MBX Lite 2-D/3-D graphics engine
- Integrated display controller supports up to 720p and WXGA resolutions
- ITU 656 interface
- 12 programmable serial controllers (PSC) each capable of UART, I²S, Codec/PCM, AC97, and SPI functionality
- SDRAM DDR1/DDR2/mobileDDR memory controller
- 10/100 Fast Ethernet media access controller (MAC)
- Three I²Cs
- PCI 2.3 interface
- Two USB 2.0 High-Speed On-The-Go (OTG), one with physical layer (PHY)
- Serial Advanced Technology Attachment/ Parallel Advanced Technology Attachment (SATA/PATA)
- Four controller area network (CAN) modules
- 64-channel intelligent DMA I/O controller
- Sony/Philips Digital Interface Format (S/PDIF) serial audio interface
- Secure Digital High-Capacity (SDHC) MMC/SD/SDIO card host controller

mobileGT™ Products

The MPC5121e is the latest addition to the mobileGT family of processors. With the consistent application of the e300 CPU core, software support and compatibility already exists, providing for a rich ecosystem of

MPC5121e Block Diagram

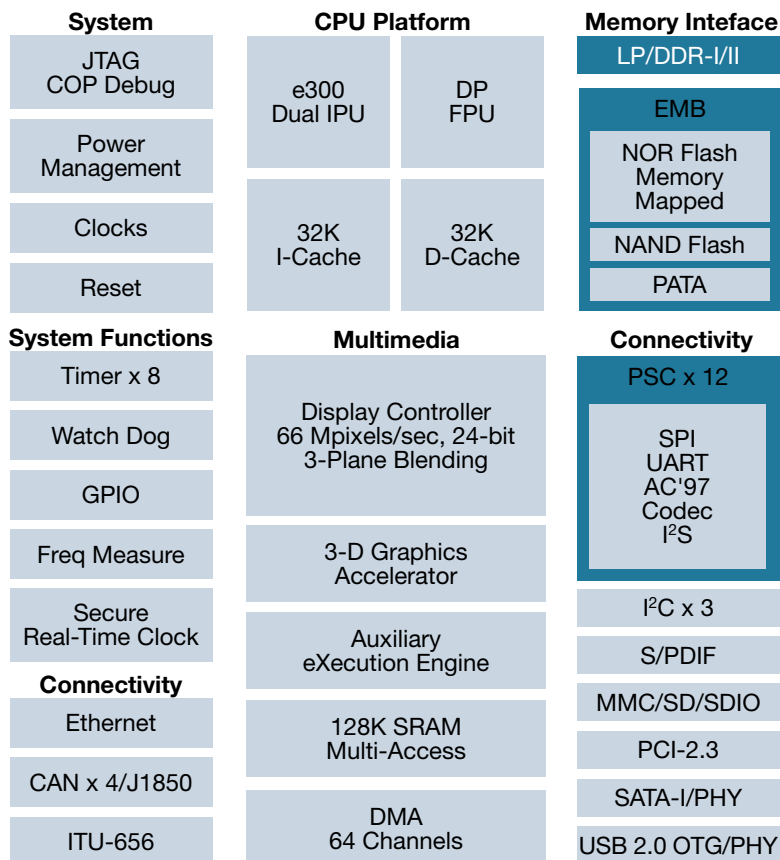

MPC5121VY400B, MPC5121VY400B

MPC5121e Selector Guide

Part Number	Market	Temp. Range	Features	Package	Speed
PPC5121VY400	Consumer	0° C to +70° C	2 CANs	516-pin TE-PBGA, pb-free, RoHS compliant	Up to 400 MHz
MPC5121VY400B	Consumer	0° C to +70° C	4 CANs ITU-656	516-pin TE-PBGA, pb-free, RoHS compliant	Up to 400 MHz
MPC5121VY400B	Industrial	-40° C to +85° C	4 CANs ITU-656	516-pin TE-PBGA, pb-free, RoHS compliant	Up to 400 MHz

development tools and support. Freescale plans to enable significant levels of firmware and software driver support. This will include popular real-time operating systems from Green Hills, QNX and Wind River, as well as open-source Linux® solutions.

Development Tools

Part Number	Description	Pricing
ADS512101	MPC5121e Base Development System	\$999.00 USD

Learn More:

For current information about 32-bit integrated processors, please visit www.freescale.com/mobilegt.



Freescale and the Freescale logo are trademarks or registered trademarks of Freescale Semiconductor, Inc. in the U.S. and other countries. The Power Architecture and Power.org word marks and the Power and Power.org logos and related marks are trademarks and service marks licensed by Power.org.

© Freescale Semiconductor, Inc. 2008

Document Number: MPC5121ECONFS
REV 2 cc

